


# RETENTION & PROTECTION CABLE SYSTEM


## STANDARD PG

Part N.	PG	Cut-out Ø mm	B mm	C mm	L mm
7ZST11	11	19	22	8	30
7ZST16	16	22.5	27	10	34
7ZST21	21	29	33	11	38
7ZST29	29	37	42	11	44
7ZST36	36	47	53	8	56

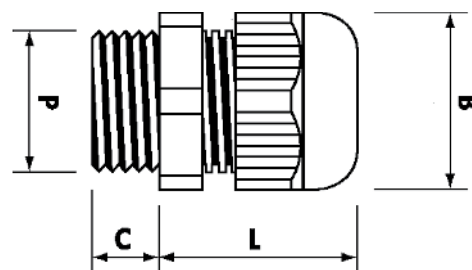

Pin connector	Type	Ø Cable	Part N.	Lock nuts	Part N.
13	PG 11	4-10 mm	7ZST11	PG 11	7ZST11D
19-25	PG 16	9-14 mm	7ZST16	PG 16	7ZST16D
37-54	PG 21	13-18 mm	7ZST21	PG 21	7ZST21D
72-85-101	PG 29	14-25 mm	7ZST29	PG 29	7ZST29D
100-150	PG 36	24-32 mm	7ZST36	PG 36	7ZST36D

## SPIRAL FLEX

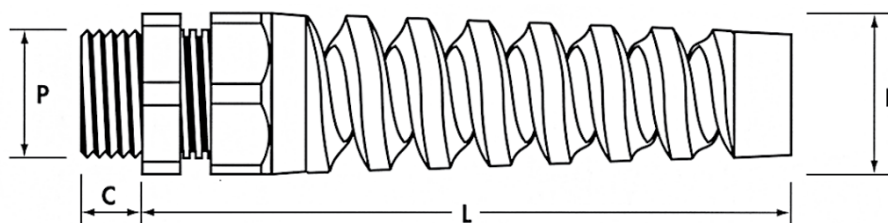

Part N.	PG	Cut-out Ø mm	B mm	C mm	L mm
7ZST11M	11	19	22	8	79
7ZST16M	16	22.5	27	10	105
7ZST21M	21	29	33	11	118

Pin connector	Type	Ø Cable	Part N.	Lock nuts	Part N.
13	PG 11	4-10 mm	7ZST11M	PG 11	7ZST11D
19-25	PG 16	9-14 mm	7ZST16M	PG 16	7ZST16D
37-54	PG 21	13-18 mm	7ZST21M	PG 21	7ZST21D

