


PART NUMBER EXPLANATION

Chain Pilot Box





Patented Chain Pilot connectors with microswitches are employed in our Chain Pilot Box

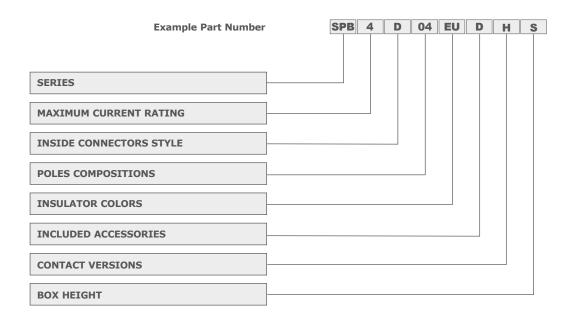

SPB Chain Pilot box version

Maximum Current Rating

4 480amp

7 750amp

Inside Connectors Style

D Drain

S Source

Poles compositions

04 L1 - L2 - L3 - PE **05** L1 - L2 - L3 - N - PE

22 Pos - Neg / Pos - Neg

Insulator Colors

EU Europe

AU Australia

UK United Kingdom

US United States

DC Two Batteries unit (Red - Black / Red - Black)

Included accessories

D IP67 Protection caps

Contact Versions

H Threaded M12 hole

P Threaded M12 post

Box Height

S 2 units

F 2,5 units

Compatible accessories to be ordered separately

SPX-SYLOCK SyntaxLock quick secondary lock release system

Spare parts

SPXDCS-SC-IP67 IP67 protection cap for source connectors **SPXDCD-SC-IP67-CP** IP67 protection cap for drain connectors SPXTKEY Secondary lock release key