


## PART NUMBER EXPLANATION

EU Version



Example Part Number **SSX 19 M V - G C MQ N T 0 0 N**

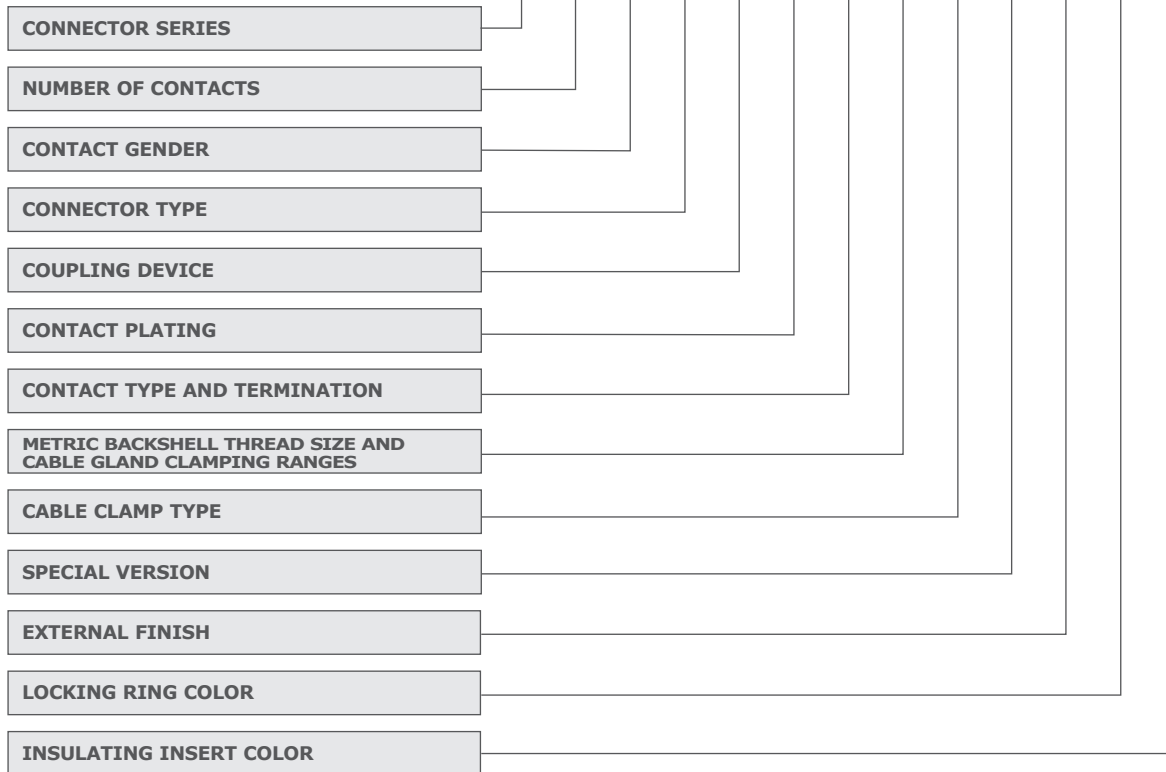

### Connector Series

**SSX** 19pin Series  
**SPK** Series

### Number of Contacts

**19**  
**16**

### Contact Gender

**M** Male  
**F** Female

### Connector Type

**V** Inline  
**P** Panel

### Coupling Device

- Thread  
**D** Threaded heavy duty locking ring  
**R** Threaded rubber coated locking ring

### Contact Plating

**G** Gold  
**S** Silver  
**N** No contact

### Contact Type and Termination

**C** Crimp  
**S** Solder  
**N** No contact  
**K** Armored crimp contact  
**Z** Armored solder contact

### Metric Backshell thread size and cable gland clamping ranges

**MQ** Thread size M 40 x 1.5 | Clamping range 15 - 23 mm  
**MP** Thread size M 40 x 1.5 | Clamping range 19 - 28 mm  
**MR** Thread size M 40 x 1.5 | Clamping range 22 - 32 mm  
**MS** Spider: M 50 Grommet - 6 hole Ø 9 to 11,7 mm  
**MO** Metric threaded backshell without cable gland  
**00** No backshell, no cable gland

### Cable Clamp Type

**N** Plastic cable gland  
**R** Metal basket weave grip strain relief (with wire mesh)  
**0** No further details

### Special Version

**T** Pre-installed solder contacts

### External Finish

**0** Black painted  
**1** Black anodized

**Colored anodized backshell available on request**

### Locking Ring Color

**0** Black  (standard)  
**1** Green   
**2** Red   
**3** Yellow   
**4** Blue 

### Insulating Insert Color

**N** Black ●  
**R** Red ●

**Other insert colors available on request**