


## PART NUMBER EXPLANATION

EU Version

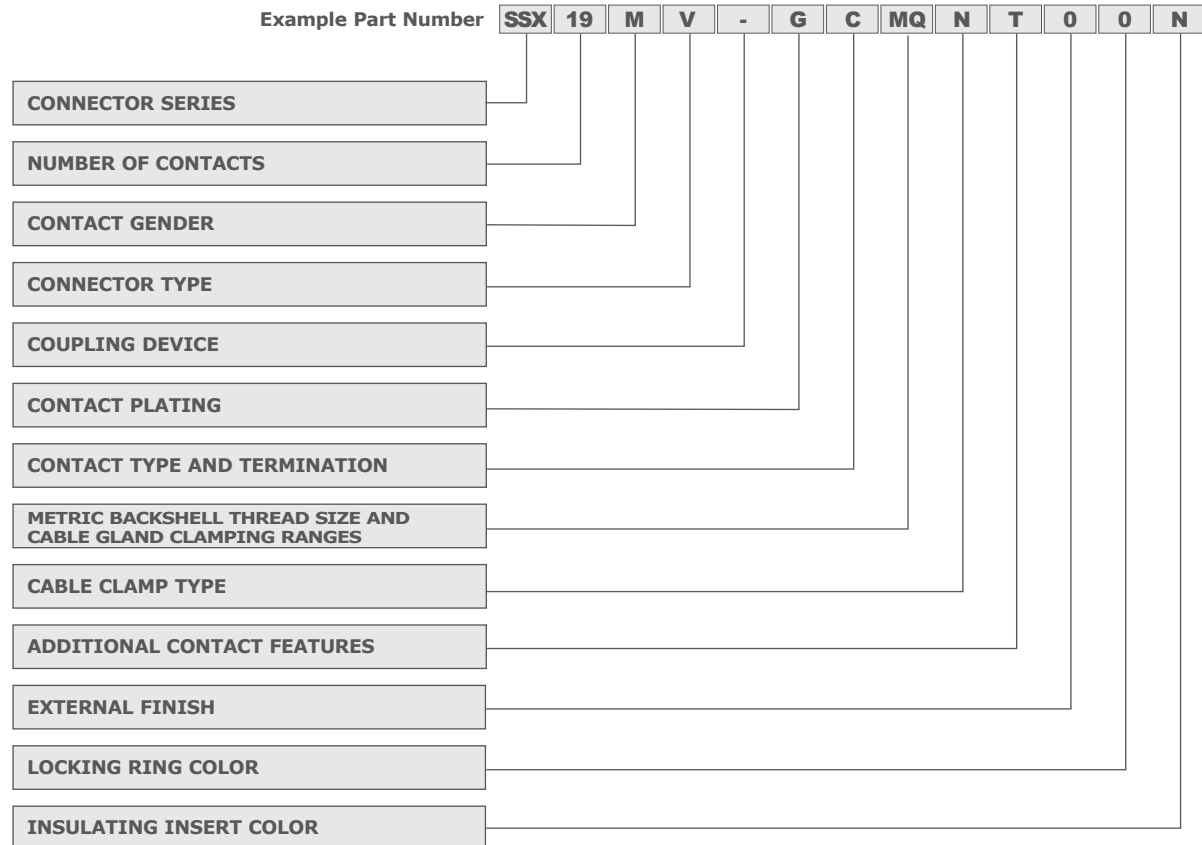

### Connector Series

**SSX** 19pin Series

### Number of Contacts

**19**

**16**

### Contact Gender

**M** Male

**F** Female

### Connector Type

**V** Inline

**P** Panel

### Coupling Device

- Thread

**D** Threaded heavy duty locking ring

**R** Threaded rubber coated locking ring

### Contact Plating

**G** Gold

**S** Silver

**N** No contact

### Contact Type and Termination

**C** Crimp

**S** Solder

**N** No contact

**K** Armored crimp contact

**Z** Armored solder contact

### Metric Backshell thread size and cable gland clamping ranges

**MQ** Thread size M 40 x 1.5 | Clamping range 15 - 23 mm

**MP** Thread size M 40 x 1.5 | Clamping range 19 - 28 mm

**MR** Thread size M 40 x 1.5 | Clamping range 22 - 32 mm

**MS** Spider: M 50 Grommet - 6 hole Ø 9 to 11,7 mm

**ME** Spider: M 50 Grommet - 8 hole Ø 10 mm

**MF** Spider: M 40 Grommet - 4 hole Ø 12 mm

**MO** Metric threaded backshell without cable gland

**OO** No backshell, no cable gland

### Cable Clamp Type

**N** Plastic cable gland

**R** Metal basket weave grip strain relief (with wire mesh)

**0** No further details

### Additional contact features

**T** Pre-installed solder contacts

**0** No further details

**4** 4mm<sup>2</sup> Crimp terminal wire section

**6** 6mm<sup>2</sup> Crimp terminal wire section

### External Finish

**0** Black painted

**1** Black anodized

**Colored anodized backshell available on request**

### Locking Ring Color


**0** Black  (standard)

**1** Green 

**2** Red 

**3** Yellow 

**4** Blue 

**5** Purple 

**6** Orange 

### Insulating Insert Color

**N** Black 

**R** Red 

**Other insert colors available on request**