


PART NUMBER EXPLANATION

UL Version

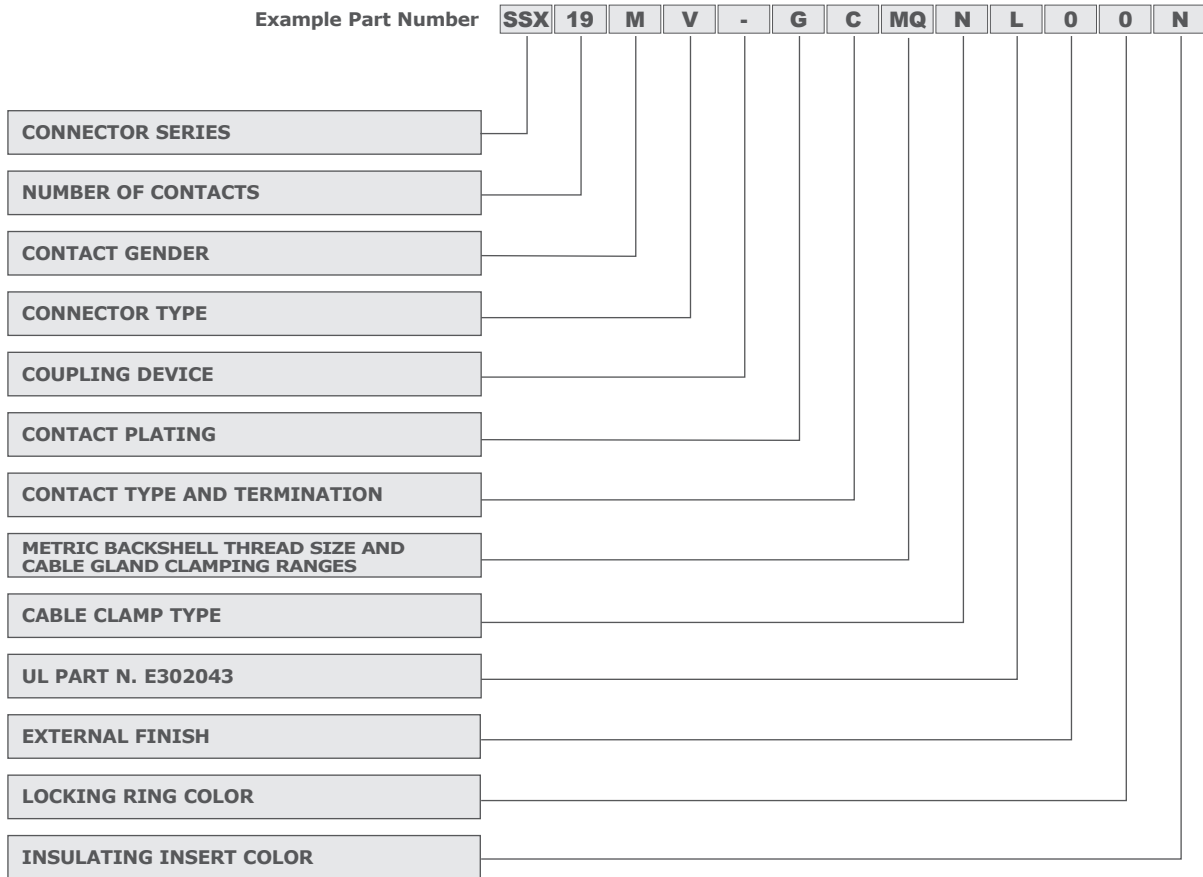

Connector Series

SSX 19pin Series

Number of Contacts

19

Contact Gender

M Male
F Female

Connector Type

V Inline
P Panel

Coupling Device

- Thread
D Threaded heavy duty locking ring
R Threaded rubber coated locking ring
B Threaded finger grip locking ring

Contact Plating

G Gold
S Silver
N No contact

Contact Type and Termination

C Crimp
S Solder
N No contact
K Armored crimp contact
Z Armored solder contact

Metric Backshell thread size and cable gland clamping ranges

MQ Thread size M 40 x 1.5 | Clamping range 15 - 23 mm
MP Thread size M 40 x 1.5 | Clamping range 19 - 28 mm

MR Thread size M 40 x 1.5 | Clamping range 22 - 32 mm

MS Spider: M 50 Grommet - 6 hole Ø 9 to 11,7 mm

ME Spider: M 50 Grommet - 8 hole Ø 10 mm

MF Spider: M 40 Grommet - 4 hole Ø 12 mm

MO Metric threaded backshell without cable gland

00 No backshell, no cable gland

Cable Clamp Type

N Plastic cable gland
R Metal basket weave grip strain relief (with wire mesh)
0 No further details

UL Part N. E302043

L UL compliant

External Finish

0 Black painted
1 Black anodized

Colored anodized backshell available on request

Locking Ring Color

0 Black (standard)
1 Green
2 Red
3 Yellow
4 Blue
5 Purple
6 Orange

Insulating Insert Color

N Black ●
R Red ●

Other insert colors available on request