


PART NUMBER EXPLANATION

SPK Speaker Series

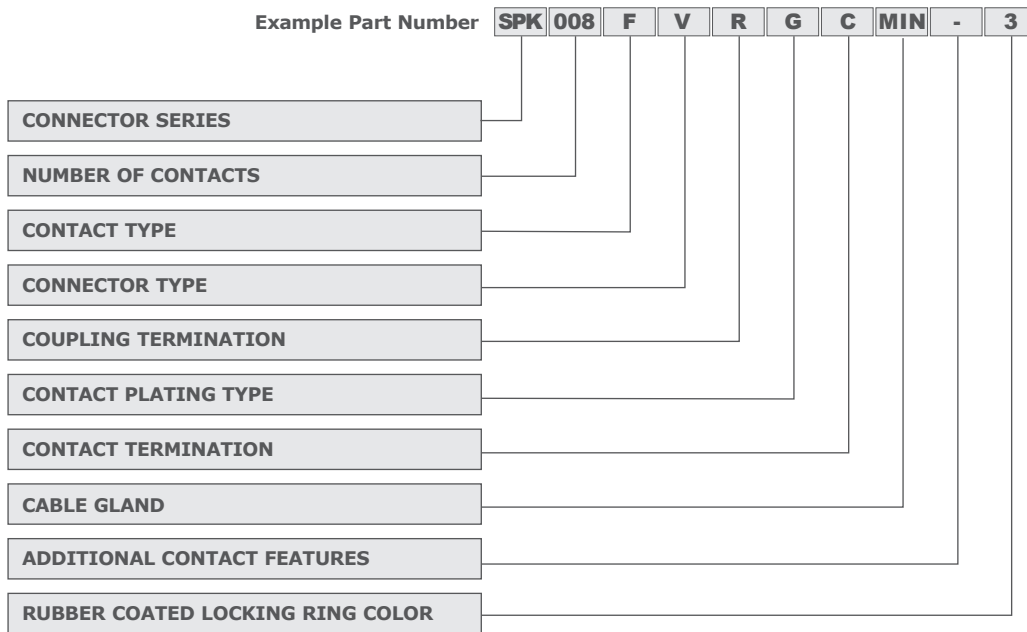

Connector Series

SPK Series (4, 8, 25 pin compliant Mil C5015 & VG95234)

Number of Contacts

004
008
025

Contact Type

M Male
F Female

Connector Type

V Inline
P Panel

Coupling Termination

- With ramps (4, 8, 25 pins)
H Aluminium locking ring
R Rubber coated locking ring
L Short aluminium locking ring

Contact Plating Type

S Silver (4, 8, 25 pin)
G Gold (4, 8, 25 pin)
N No contact

Contact Type and Termination

C Spring loaded crimp
S Spring loaded solder
P Spring loaded pcb
N No contact






Cable Gland (more options available)

MIN Metric M20 x 1.5 Ø cable 10 - 14 mm (SPK 4)
MMN Metric M32 x 1.5 Ø cable 11 - 21 mm (SPK 8 pin)
MUN Metric M50 x 1.5 Ø cable 32 - 38 mm (SPK 25 pin)
MON Without cable gland
MSR Strain relief (See also Optional Accessories section)
MSF Metric spiral flex
MF4 4-way grommet for M40 cable gland
C5N 12C Metal cable gland (only for 8 pin)
M05 Without cable gland (M50 version for SPK 25pin)
M04 Without cable gland (M40 version for SPK 25pin)

Additional contact features

T Pre-installed solder contacts
0 No further details
4 4mm² Crimp terminal wire section
6 6mm² Crimp terminal wire section

Rubber coated locking ring color

0 Black  (standard)
1 Green 
2 Red 
3 Yellow 
4 Blue 

Optional Accessories (to be ordered separated)

Grommets

SVK025AD-M63-3W SPK 25 pin with M63 cable gland + adapter and 3-way grommet
SVK025AD-M63-6W SPK 25 pin with M63 cable gland + adapter and 6-way grommet
SVK025AD-M63-12W SPK 25 pin with M63 cable gland + adapter and 12-way grommet

Strain Relief

7ZK20A095B127 M20X1.5 Ø 9.5 to 12.7 mm (.374" to .500")
7ZK20A1275B1587 M20X1.5 Ø 12.7 to 15.8 mm (.500" to .625")
7ZK32A127B158 M32X1.5 Ø 12.7 to 15.8 mm (.500" to .625")
7ZK32A158B1905 M32X1.5 Ø 15.8 to 19.0 mm (.625" to .750")
7ZK32A1905B2222 M32X1.5 Ø 19.0 to 22.2 mm (.750" to .875")
7ZK40A1905B2222 M40X1.5 Ø 19.0 to 22.2 mm (.750" to .875")
7ZK40A222B254 M40X1.5 Ø 22.2 to 25.4 mm (.875" to 1.000")
7ZK40A254B2857 M40X1.5 Ø 25.4 to 28.5 mm (1.000" to 1.125")
7ZK40A2857B3175 M40X1.5 Ø 28.5 to 31.7 mm (1.125" to 1.250")