


PART NUMBER EXPLANATION

SVS Series

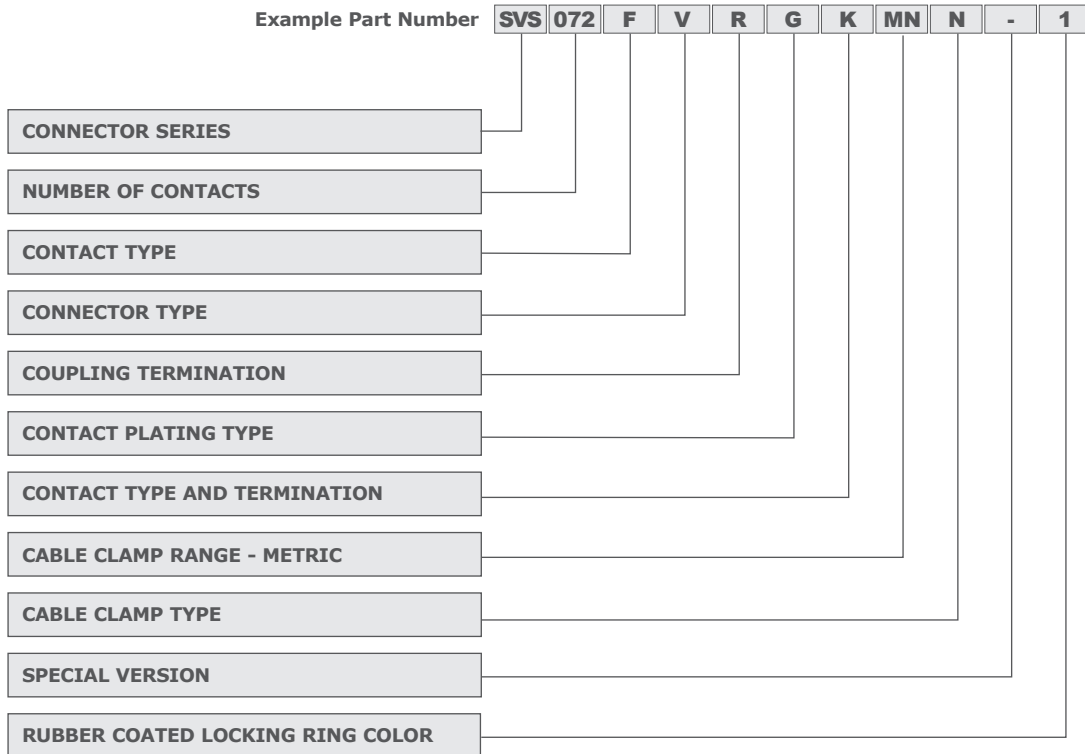

Connector Series

SVS Series (72, 101 pin)

Number of Contacts

072

101

Contact Type

M Male

F Female

Connector Type

V Inline

P Panel

Coupling Termination

- With ramps

H Ergonomic locking ring with improved thickness and stronger roller pins

R Rubber coated locking ring

Contact Plating Type

G Gold (72, 101 pin)

N No contact

Contact type and termination

N No contact

K Armored crimp contact (72, 101 pin)

Z Armored solder contact (72, 101 pin)

Cable clamp range - metric

MN Thread size M32 x 1.5 | Clamping range 7-15mm (SVS 72-101 pins)

MM Thread size M32 x 1.5 | Clamping range 11-21mm (SVS 72-101 pins)

MO Thread size M32 x 1.5 | Clamping range 18-25mm (SVS 72-101 pins)

MO Without cable gland

Cable Clamp Type

N Normal

S Spiral flex

R Strain relief (See also Optional Accessories section)

Special version (upon request)

T Inserted solder termination contacts

0 Not pre-installed


Rubber coated locking ring color

0 Black  (standard)

1 Green 

2 Red 

3 Yellow 

4 Blue 

Optional Accessories (to be ordered separated)

Strain Relief

7ZK32A127B158 M32X1.5 Ø 12.7 to 15.8 mm (.500" to .625")

7ZK32A158B1905 M32X1.5 Ø 15.8 to 19.0 mm (.625" to .750")

7ZK32A1905B2222 M32X1.5 Ø 19.0 to 22.2 mm (.750" to .875")