


PART NUMBER EXPLANATION

SVS Series



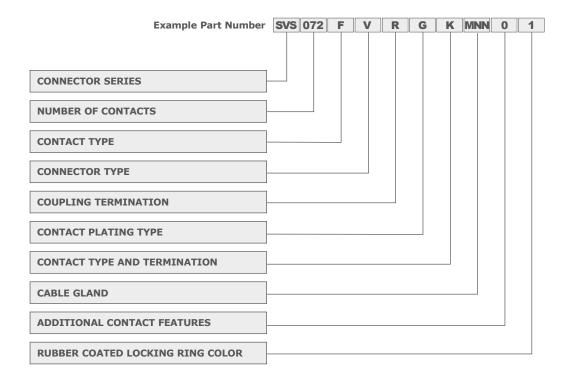

Connector Series

SVS Series (72, 101 pin)

Number of Contacts

072 101

Contact Type M Male F Female

Connector Type

V Inline

P Panel

Coupling Termination

- With ramps

H Aluminium black locking ring

R Rubber coated locking ring

Contact Plating Type

G Gold (72, 101 pin)

N No contact

Contact type and termination

N No contact

K Armored crimp contact (72, 101 pin)

Z Armored solder contact (72, 101 pin)

Cable gland

MNN Thread size M32 x 1.5 | Clamping range 10-15mm (SVS 72-101 pins) **MMN** Thread size M32 x 1.5 | Clamping range 11-21mm (SVS 72-101 pins) **MON** Thread size M32 x 1.5 | Clamping range 18-25mm (SVS 72-101 pins) **MSF** Metric spiral flex (Check clamping range options before ordering) **M00** Without cable gland

Additional contact features

 ${f T}$ Inserted solder termination contacts

O Not pre-installed

Rubber coated locking ring color (when appliable)



Optional Accessories (to be ordered separately)

Strain Relief (other models available, see website) 7ZK32A112B140 M32 × 1.5 Ø 11.2 to 14.0 mm (.44" to .56") **7ZK32A142B175** M32 × 1.5 Ø 14.2 to 17.5 mm (.56" to .69") **7ZK32A160B191** M32 × 1.5 Ø 16.0 to 19.1 mm (.63" to .75") **7ZK32A191B224** M32 × 1.5 Ø 19.1 to 22.4 mm (.75" to .88")