


## PART NUMBER EXPLANATION

SVK Series

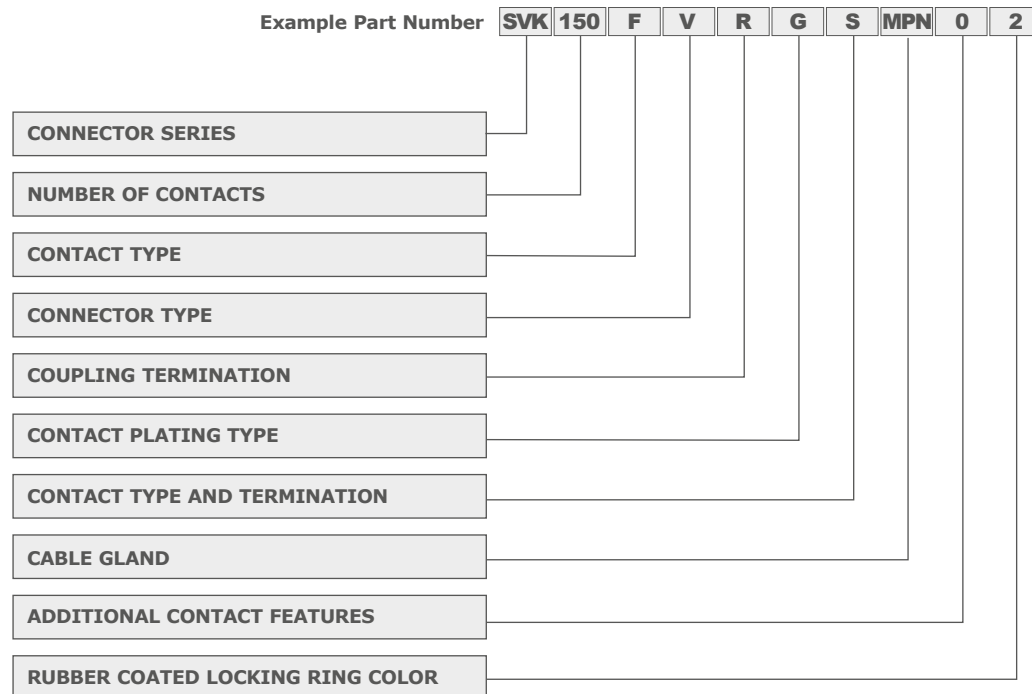

### Connector Series

**SVK** Series (13, 19, 25, 37, 54, 85, 100, 150 pin)

### Number of Contacts

013	054
019	085
025	100
037	150

### Contact Type

**M** Male  
**F** Female

### Connector Type

**V** Inline  
**P** Panel

### Coupling Termination

- With ramps  
**H** Aluminium black locking ring  
**R** Rubber coated locking ring

### Contact Plating Type

**S** Silver (13, 19, 25, 37, 54, 85 pin)  
**G** Gold (13, 19, 25, 37, 54, 85, 100, 150 pin)  
**N** No contact

### Contact type and termination

**C** Spring loaded crimp (13, 19, 25, 37, 54, 85 pin)  
**S** Spring loaded solder (13, 19, 25, 37, 54, 85 pin)  
**P** Spring loaded pcb (13, 19, 25, 37, 54, 85 pin)  
**N** No contact  
**K** Armored crimp contact (13, 19, 25, 37, 54, 85, 100, 150 pin)  
**Z** Armored solder contact (13, 19, 25, 37, 54, 85, 100, 150 pin)

### Cable gland

**MHN** Thread size M20 x 1.5 | Clamping range 6-12mm (SVK 13-19 pins)  
**MIN** Thread size M20 x 1.5 | Clamping range 10-14mm (SVK 13-19 pins)  
**MJN** Thread size M25 x 1.5 | Clamping range 6-13mm (SVK 25 pins)

**MLN** Thread size M25 x 1.5 | Clamping range 13-18mm (SVK 25 pins)  
**MNN** Thread size M32 x 1.5 | Clamping range 7-15mm (SVK 37-54 pins)  
**MMN** Thread size M32 x 1.5 | Clamping range 11-21mm (SVK 37-54 pins)  
**MON** Thread size M32 x 1.5 | Clamping range 18-25mm (SVK 37-54 pins)  
**MQN** Thread size M40 x 1.5 | Clamping range 15-23mm (SVK 85-100-150 pins)  
**MPN** Thread size M40 x 1.5 | Clamping range 19-28mm (SVK 85-100-150 pins)  
**MRN** Thread size M40 x 1.5 | Clamping range 22-32mm (SVK 85-100-150 pins)  
**MSF** Metric spiral flex (SVK 13-19-25-37-54 - Check clamping range options before ordering)  
**M00** Without cable gland

### Additional contact features

**T** Inserted solder termination contacts  
**0** Not pre-installed  
**2** Reduced crimp terminal (Wire section AWG 26÷20 / 0,15÷0,6mm<sup>2</sup>)

### Rubber coated locking ring color (when applicable)

**0** Black (standard)  
**1** Green  
**2** Red  
**3** Yellow  
**4** Blue

### Optional Accessories (to be ordered separately)

#### Strain Relief (other models available, see website)

**7ZK20A096B127** M20 x 1.5 Ø 9.53 to 12.70 mm (.375" to .500")  
**7ZK20A127B158** M20 x 1.5 Ø 12.70 to 15.88 mm (.500" to .625")  
**7ZK25A127B158** M25 x 1.5 Ø 12.70 to 15.88 mm (.500" to .625")  
**7ZK32A112B140** M32 x 1.5 Ø 11.2 to 14.0 mm (.44" to .56")  
**7ZK32A142B175** M32 x 1.5 Ø 14.2 to 17.5 mm (.56" to .69")  
**7ZK32A160B191** M32 x 1.5 Ø 16.0 to 19.1 mm (.63" to .75")  
**7ZK32A191B224** M32 x 1.5 Ø 19.1 to 22.4 mm (.75" to .88")  
**7ZK40A191B224** M40 x 1.5 Ø 19.1 to 22.4 mm (.75" to .88")  
**7ZK40A224B254** M40 x 1.5 Ø 22.4 to 25.4 mm (.88" to 1.00")  
**7ZK40A254B285** M40 x 1.5 Ø 25.4 to 28.58 mm (1.00" to 1.125")  
**7ZK40A286B317** M40 x 1.5 Ø 28.58 to 31.75 mm (1.125" to 1.250")