


PART NUMBER EXPLANATION

SVK Series



Example Part Number **SVK 150 F V R G S MPN 0 2**

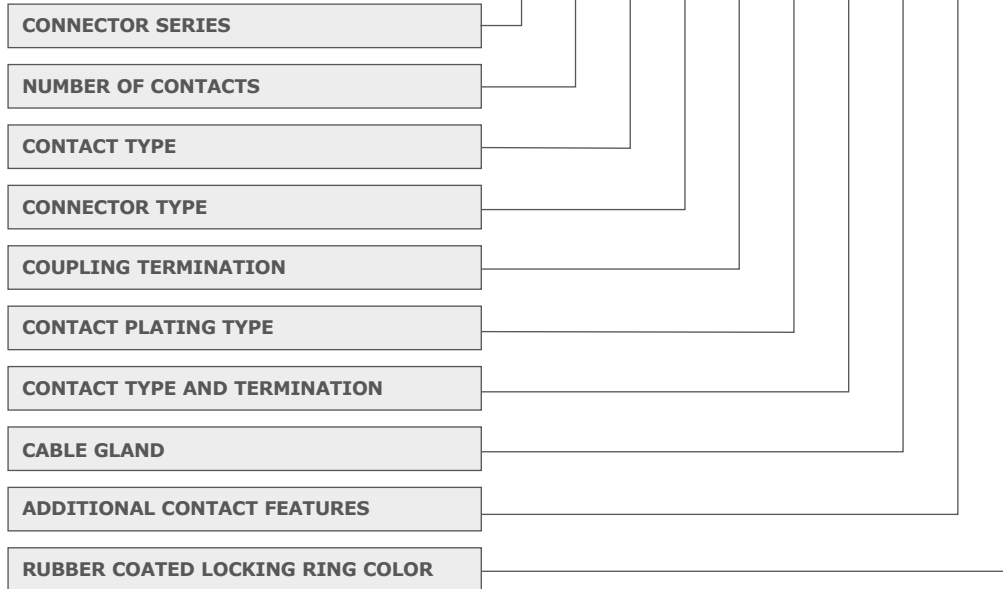

Connector Series

SVK Series (13, 19, 25, 37, 54, 85, 100, 150 pin)

Number of Contacts

013	054
019	085
025	100
037	150

Contact Type

M Male
F Female

Connector Type

V Inline
P Panel

Coupling Termination

- With ramps
H Aluminium black locking ring
R Rubber coated locking ring

Contact Plating Type

S Silver (13, 19, 25, 37, 54, 85 pin)
G Gold (13, 19, 25, 37, 54, 85, 100, 150 pin)
N No contact

Contact type and termination

C Spring loaded crimp (13, 19, 25, 37, 54, 85 pin)
S Spring loaded solder (13, 19, 25, 37, 54, 85 pin)
P Spring loaded pcb (13, 19, 25, 37, 54, 85 pin)
N No contact
K Armored crimp contact (13, 19, 25, 37, 54, 85, 100, 150 pin)
Z Armored solder contact (13, 19, 25, 37, 54, 85, 100, 150 pin)

Cable gland

MHN Thread size M20 x 1.5 | Clamping range 8-13mm (SVK 13-19 pins)
MIN Thread size M20 x 1.5 | Clamping range 10-14mm (SVK 13-19 pins)
MJN Thread size M25 x 1.5 | Clamping range 8-13mm (SVK 25 pins)

MLN Thread size M25 x 1.5 | Clamping range 13-18mm (SVK 25 pins)
MNN Thread size M32 x 1.5 | Clamping range 10-15mm (SVK 37-54 pins)
MMN Thread size M32 x 1.5 | Clamping range 11-21mm (SVK 37-54 pins)
MON Thread size M32 x 1.5 | Clamping range 18-25mm (SVK 37-54 pins)
MQN Thread size M40 x 1.5 | Clamping range 15-23mm (SVK 85-100-150 pins)
MPN Thread size M40 x 1.5 | Clamping range 19-28mm (SVK 85-100-150 pins)
MRN Thread size M40 x 1.5 | Clamping range 22-32mm (SVK 85-100-150 pins)
MSF Metric spiral flex (SVK 13-19-25-37-54 - Check clamping range options before ordering)
M00 Without cable gland

Additional contact features

T Inserted solder termination contacts
0 Not pre-installed
2 Reduced crimp terminal (Wire section AWG 26÷20 / 0,15÷0,6mm²)

Rubber coated locking ring color (when applicable)

0 Black  (standard)
1 Green 
2 Red 
3 Yellow 
4 Blue 

Optional Accessories (to be ordered separately)

Strain Relief (other models available, see website)

7ZK20A096B127 M20 x 1.5 Ø 9.53 to 12.70 mm (.375" to .500")
7ZK20A127B158 M20 x 1.5 Ø 12.70 to 15.88 mm (.500" to .625")
7ZK25A127B158 M25 x 1.5 Ø 12.70 to 15.88 mm (.500" to .625")
7ZK32A112B140 M32 x 1.5 Ø 11.2 to 14.0 mm (.44" to .56")
7ZK32A142B175 M32 x 1.5 Ø 14.2 to 17.5 mm (.56" to .69")
7ZK32A160B191 M32 x 1.5 Ø 16.0 to 19.1 mm (.63" to .75")
7ZK32A191B224 M32 x 1.5 Ø 19.1 to 22.4 mm (.75" to .88")
7ZK40A191B224 M40 x 1.5 Ø 19.1 to 22.4 mm (.75" to .88")
7ZK40A224B254 M40 x 1.5 Ø 22.4 to 25.4 mm (.88" to 1.00")
7ZK40A254B285 M40 x 1.5 Ø 25.4 to 28.58 mm (1.00" to 1.125")
7ZK40A286B317 M40 x 1.5 Ø 28.58 to 31.75 mm (1.125" to 1.250")