


## PART NUMBER EXPLANATION

Lug Converters with SPY ComLug and EasiLug contacts - Line version



Example Part Number

SPY 4 LD E GN 1L 120 MQ

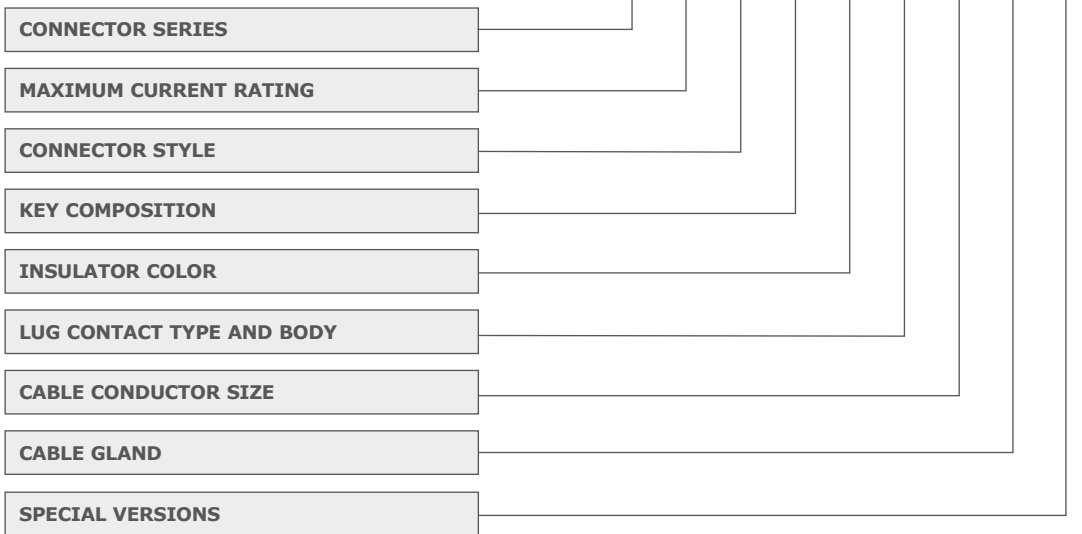

### Connector Series

**SPY** for Lug Series

### Maximum Current Rating

**4** Up to 480amp (25 to 150mm<sup>2</sup>)  
**7** Up to 750amp (185 to 300mm<sup>2</sup>)

### Connector Style

**LD** Line Drain  
**LS** Line Source

### Key Composition

**E** Earth  
**N** Neutral  
**1** Phase 1  
**2** Phase 2  
**3** Phase 3

### Insulator Color

**GN** Green

**BL** Blue

**BR** Brown

**BK** Black

**GY** Gray

**RD** Red

**YE** Yellow

**WH** White

### Lug contact type and body

**0L** EasiLug without lug terminal (standard body)  
**1L** EasiLug with lug terminal (standard body)  
**8L** ComLug L Threaded M12 (standard body)  
**9H** ComLug L2 Threaded M12 (oversized body)  
**9L** ComLug XL Threaded M12 (oversized body)

### Cable Conductor size for EasiLug terminal

**000** Without EasiLug terminal / For ComLug L or XL  
**120** 120 mm<sup>2</sup> aluminum cable  
**150** 150 mm<sup>2</sup> aluminum cable  
**185** 185 mm<sup>2</sup> aluminum cable  
**240** 240 mm<sup>2</sup> aluminum cable  
**300** 300 mm<sup>2</sup> aluminium cable

### Cable Gland

**MO** NO cable gland  
**MQ** Reduced M40 gland Ø 15-23 mm  
**MP** Normal M40 gland Ø 19-28 mm  
**MR** Oversized M40 gland Ø 22-32 mm  
**MU** M50 gland Ø 30-38 mm

### Special versions

**00** No special version

### Compatible accessories, to be ordered separately

**SPX-SYLOCK** SyntaxLock quick secondary lock release system  
**SPXTKEY** Secondary lock release key

**SPXDCS-SC** IP53 Protective plastic cap kit for source connectors  
**SPXDCD-SC** IP53 Protective plastic cap kit for drain connectors  
**SPXDCS-SC-IP67** IP67 protection cap for source connectors  
**SPXDCD-SC-IP67** IP67 protection cap for drain connectors